



Guyed Post Rig (Complete)

Assembly Instructions



Your Kit Includes:

- 4 x long heavy gauge ground pegs
- 2 x 75mm pressure treated posts with:
 - 6 x small screw eyes
 - 2 x welded screw eyes
- 4 x guy ropes
- 4 x guy rope tensioners
- 1 x overhead support rope
- 2 x hammock end ropes

You Will Also Need:

- 1 x heavyweight hammer for ground pegs
- 1 x measuring tape for floor plan

Erection Sequence:

- 1) Use a measuring tape to mark the points A-F as shown in Fig 2.
- 2) Use the heavyweight hammer to install the four ground pegs at positions A, B, E, and F. Ensure that the pegs at A and B are angled AWAY from point C at least 60 degrees and the pegs at E and F are angled AWAY from point D at least 60 degrees as shown in Fig 4.
- 3) Get a friend to support one of the posts so that it's base is at point C and loop the two guy lines over the pegs at A and B. Use the tensioners to adjust the guy lengths so that a pyramid is formed between guys and post.
- 4) Whilst still supporting the first post move the 2nd post so that it's base rests on point D and loop the guys around the pegs at E and F. Tighten the guys at this end as before.
- 5) Adjust the tensioners so that the stand is symmetrical and the posts are vertical when viewed end on.
- 6) Use the hammock ropes supplied and the hammock knot shown in our handbook to hang your hammock from the welded eyes. Hang the hammock relatively high at first and gently ease your weight onto it. The new rig ropes will give a little initially and the tensioners should be adjusted so that the overhead support rope is taut when the rig is not in use. When in use the overhead rope will slacken slightly - this is normal.

7) HINT: If you hear or feel excessive creaking from the ropes when the hammock is in use, try spraying some WD40 onto the welded eyes. This reduces friction and results in a smoother motion.

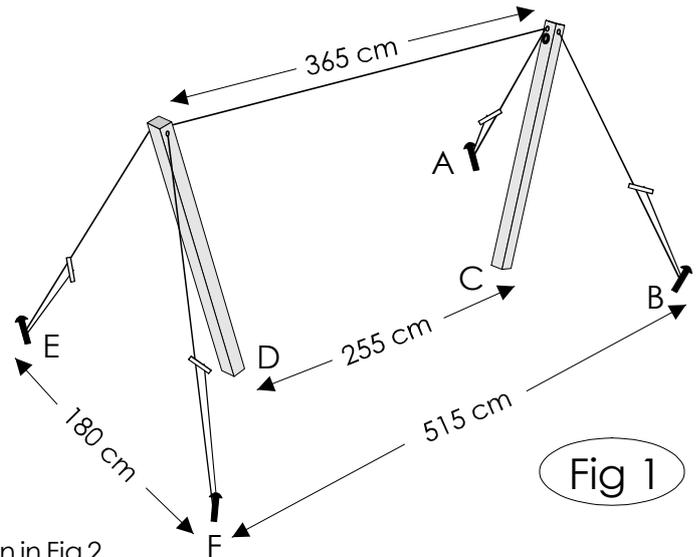


Fig 1


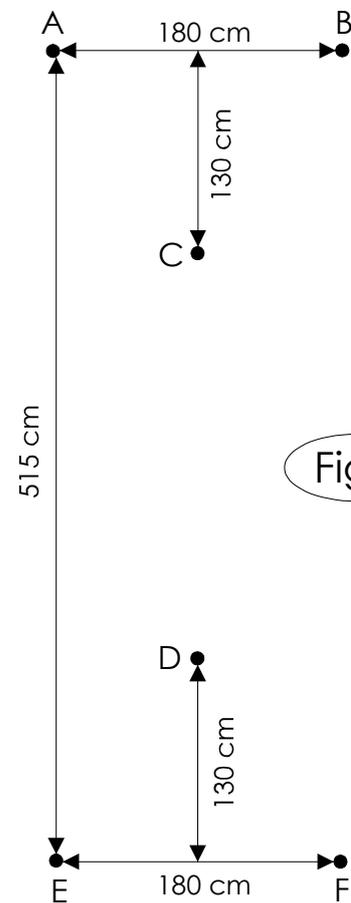


Fig 2



- ← screw eyes for guys
- ← screw eye for overhead rope
- ← welded screw eye for short hammock rope

Fig 3

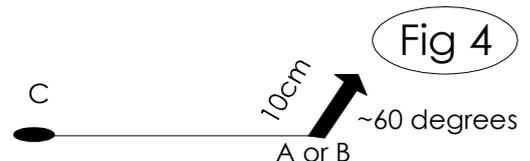


Fig 4

Pegs at A and B angled AWAY from C
Pegs at E and F angled AWAY from D